

APPROVAL SHEET

PCB ANTENNA

2.4 GHz Band Working Frequency

Halogens Free Product

P/N: RFPCA460605NNAB301

Customer : _____
Customer 's Part No. : _____
Approval No. : _____
Issue Date : _____

*Contents in this sheet are subject to change without prior notice.

Version	Date	Description	Author
V01	2015 Mar.	New Release	PIPI

ELECTRICAL CHARACTERISTICS

Item	Specification
Frequency Range	2.4 ~ 2.5 GHz
Impedance	50 Ohm Nominal
Return Loss	-10 dB (Max)
Peak Gain	3.85 dBi
VSWR	2.0 (Max)
Radiation	Omni-directional
Polarization	Linear Vertical
Admitted Power	1W

*note-1: Electrical characteristics will depend on customer's final application.


MATERIAL TABLE

Items	Description
Cable	φ 1.13(Black)
FPC Antenna	FR4(綠漆板) T=0.8mm
Sponge+Double Tape	EVA+G9000

ORDERING RULE

RF	PCA	4606	05	N	N	A	B	3	01
Type Code	Product Code	PCB Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
Walsin RF Device	PCA: PCB Antenna	Per 2 digits of length, width e.g.: 4606 Length 46.5mm, Width 6.0mm	2 digits for cable length e.g.: 11 Cable Length:11cm	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 5: 5GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band N: NFC T: LTE band W: WCDMA band	B: MP T:Durin g Test X: Pile Run	0:None 1:φ 0.81 3:φ 1.13 6:RG316 7:φ 1.37 8:RG178	01-99 series number


Appendix A: Dimensions

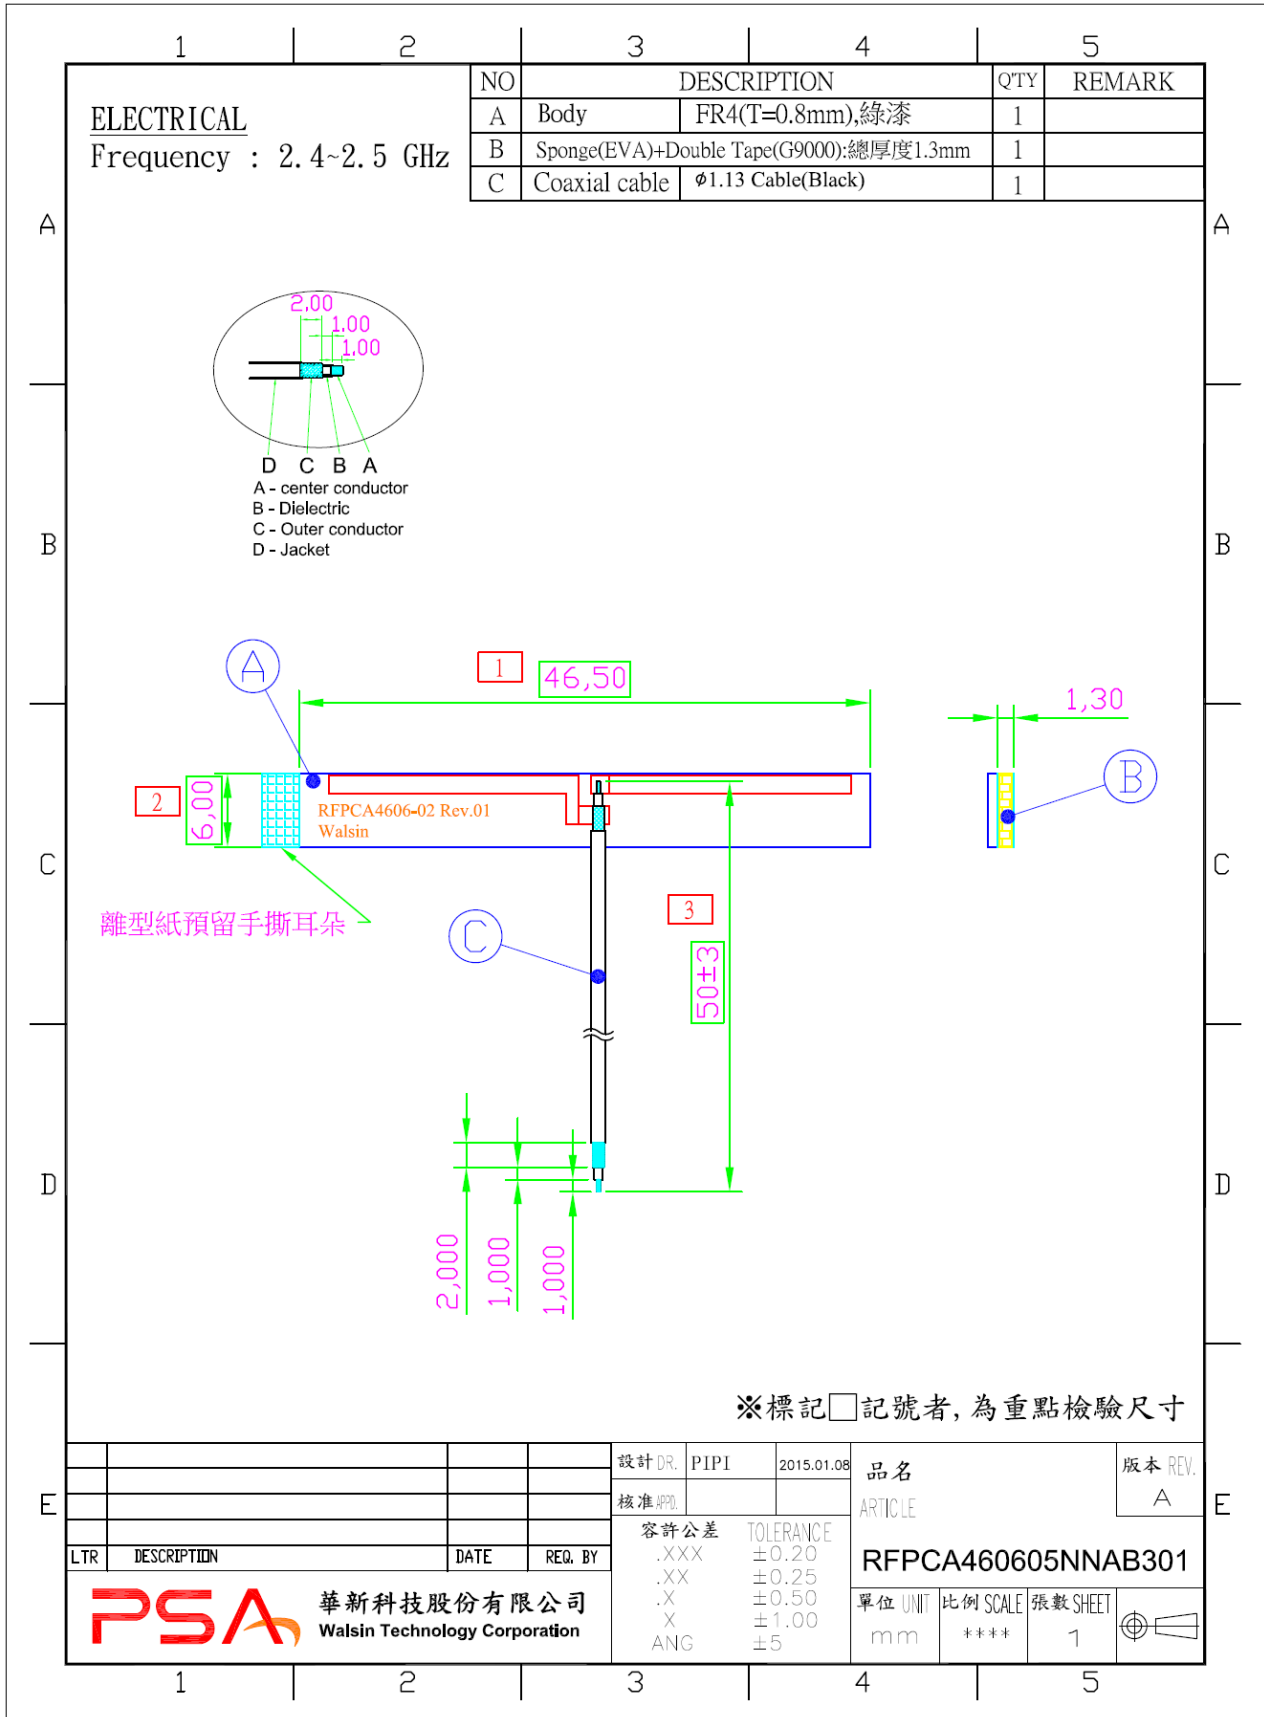




Test Report

ELECTRICAL CHARACTERISTICS


Return Loss

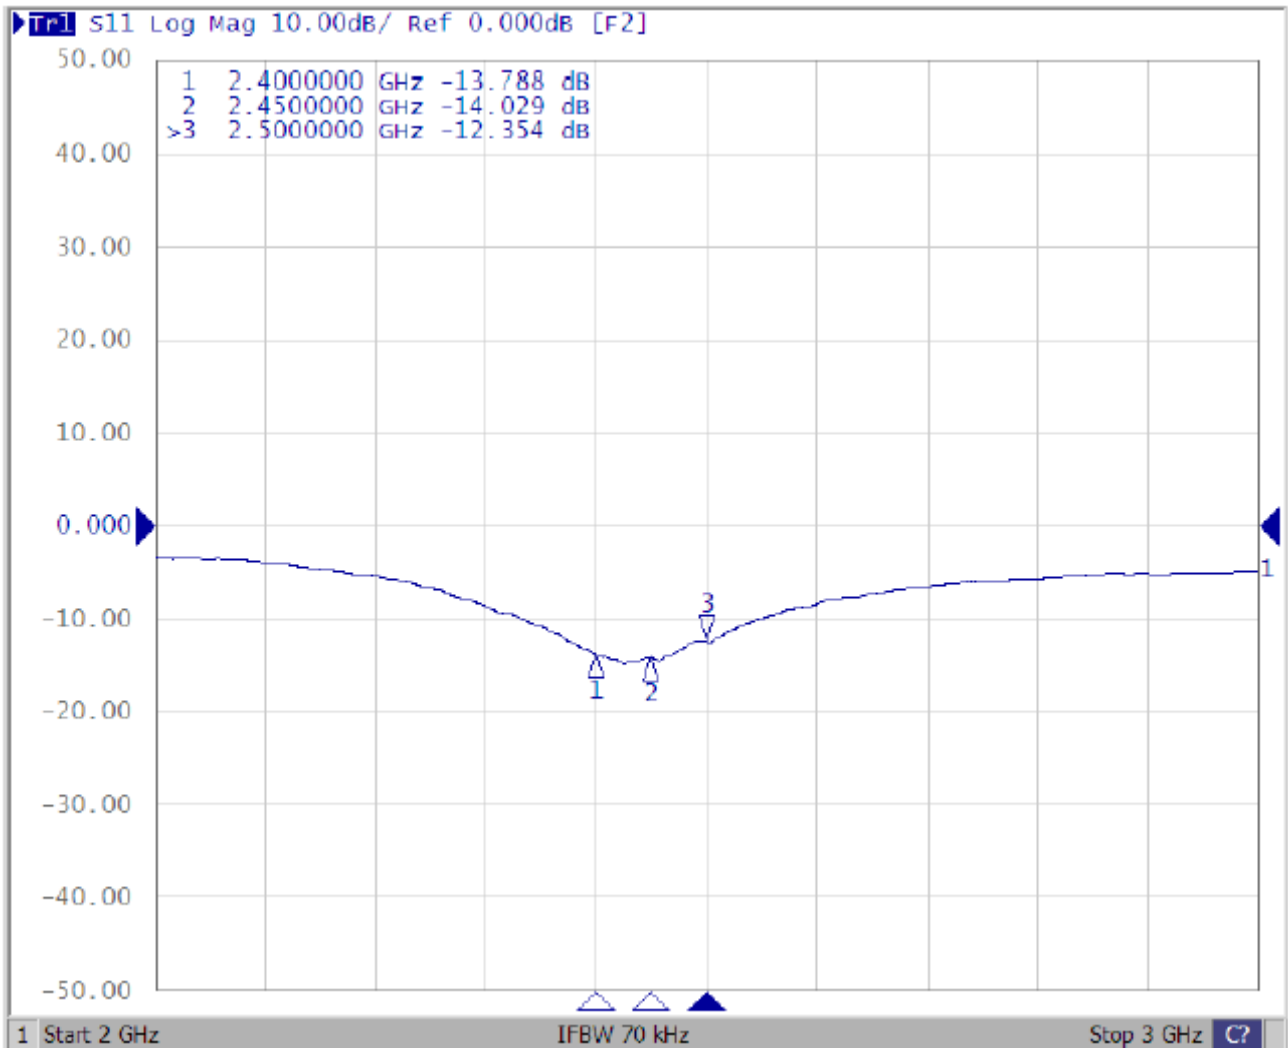

Antenna Efficiency & Peak Gain
2400~2500 MHz

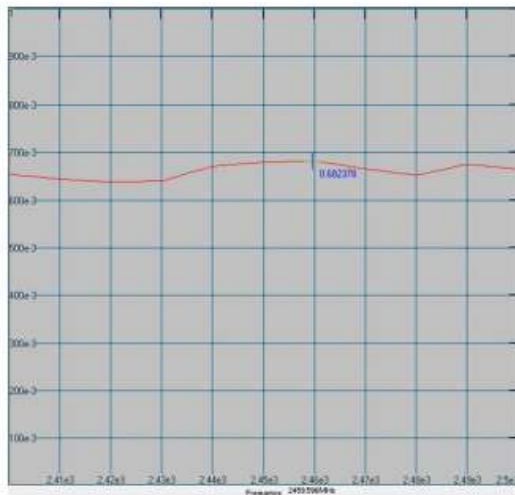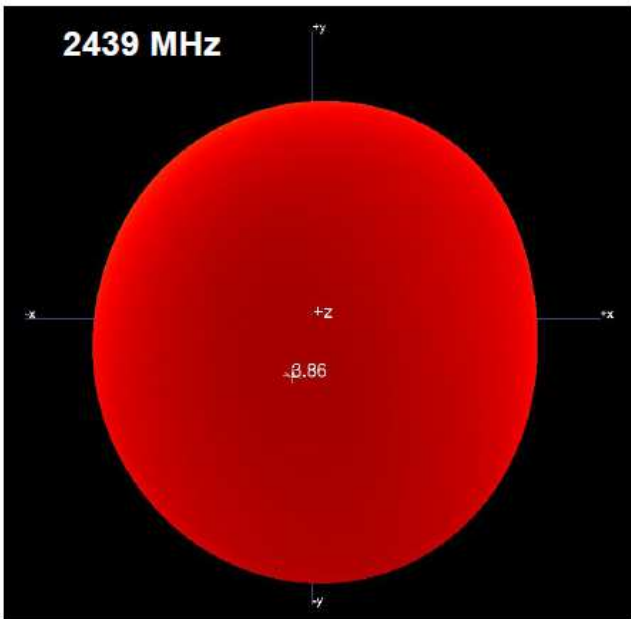

Maximum Efficiency at 2459 MHz : 68.2 %

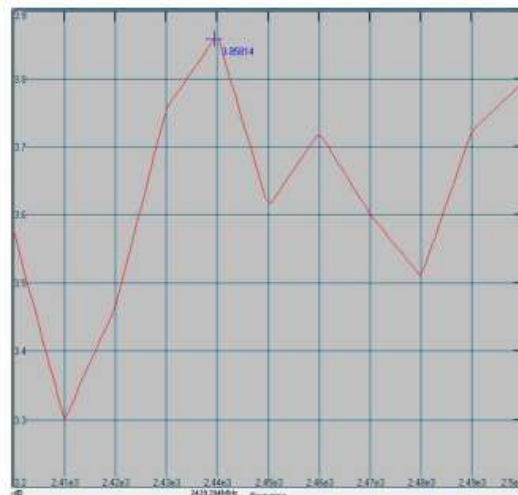


Maximum Peak Gain at 2439 MHz : 3.85dBi

RADIATION PATTERN

2400~2500 MHz

Phi=0.00deg

Gain . dB

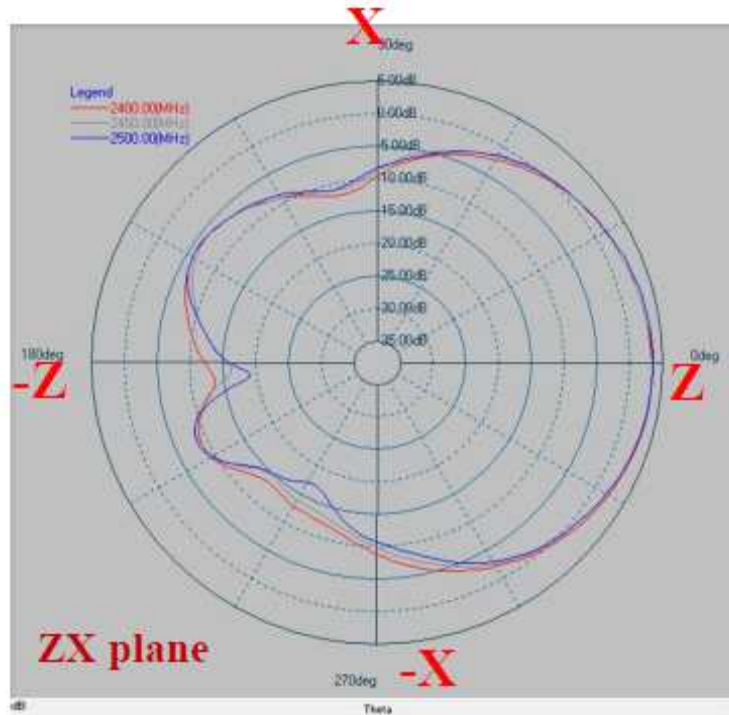


Frequency [MHz]	ZX plane	
	Max Value [dB]	Average [dB]
2400	3.52	-2.13
2450	3.42	-2.24
2500	3.62	-2.18

2400~2500 MHz

Phi=90.00deg

Gain . dB

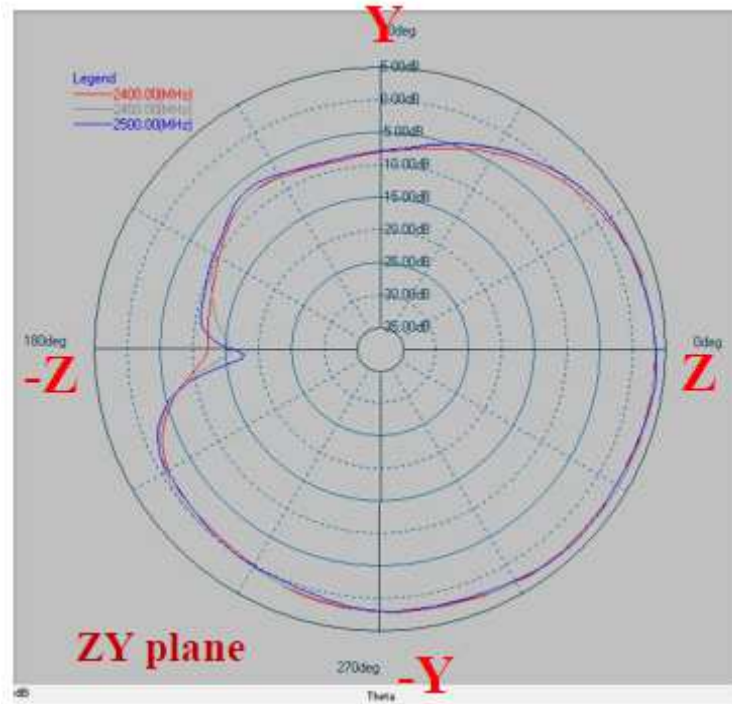


	ZY plane	
Frequency [MHz]	Max Value [dB]	Average [dB]
2400	3.53	-0.10
2450	3.61	0.12
2500	3.79	-0.01

2400~2500 MHz





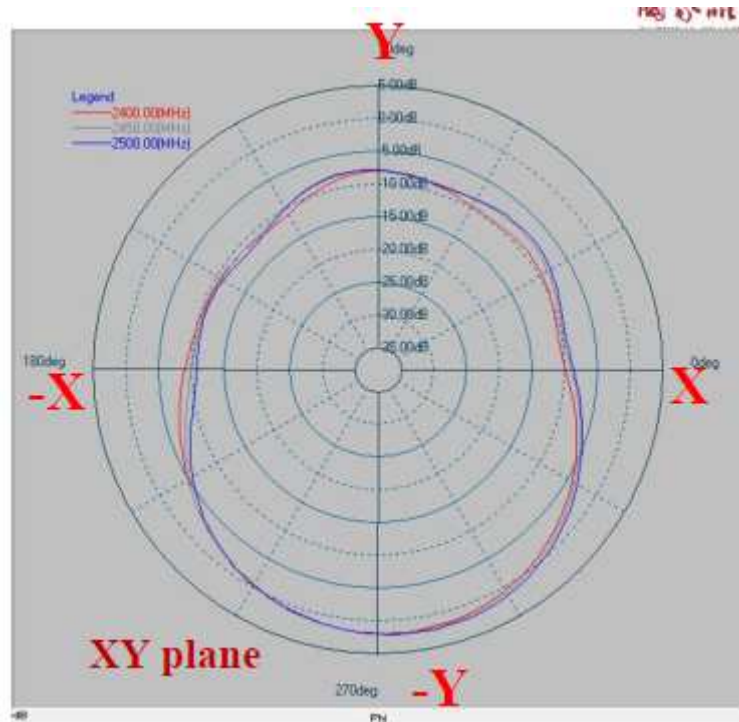






Theta=90.00deg

Gain . dB



	XY plane	
Frequency [MHz]	Max Value [dB]	Average [dB]
2400	1.83	-3.81
2450	1.91	-3.62
2500	2.10	-3.52

Packaging

華新科技股份有限公司						
RFPCA460605NNAB301 製品工程表	頁次： 4 之 3					
	規章編號： 版次：A版					
	制修訂日期：2015/3/13					
產品包裝圖示：						
圖一						
	⇒		⇒			
單pcs產品		PE袋		每10pcs一扎，每PE袋放10扎，PE袋需封口		
圖二						
	⇒		⇒			
珍珠棉		外箱		珍珠棉放入外箱		
圖三						
	⇒		⇒		⇒	
產品包裝規範：						
1.將每10pcs產品使用珍珠棉將IPEX端用白色橡皮筋包扎,然後裝入PE袋內，每PE袋裝10扎，每PE袋100pcs，PE袋需封口，如圖示（一）						
2.將珍珠棉放入外箱中（如圖示二）						
3.將裝好的成品(如圖示三)放入外箱中，每箱放2000pcs產品，上下各放1片珍珠棉，將包裝好的外箱貼標籤，標籤需貼到最小包裝。						
製造標籤圖示：實物標籤內容僅作參考 具體內容以出貨料號為準						
		(NO 1.): Spec desc. (NO 2.): 料號 批號 數量(PN & LOT & QTY) (NO 3.): 盤點條碼(Inventory check barcode) (NO 4.): 列印時間-總張數(print system time-total piece this print) (NO 5.): 表示 BULK LOT (NO 6.):表示該張標籤流水序號				
核准：	何耀輝	審核：	袁蕊蕊	制定：	印芸	